


Quick Coupling "AWG MultiLug" System DBGM

The new symmetrical AWG - Quick Coupling was developed as a connection unit for high-volume delivery hoses. Based upon a highly modified "Storz" coupling system and an evolved sealing principle, this allows a quick locking or unlocking of hose ends by a turn of 5°. An integrated locking device avoids unintentional uncoupling.

■ Aluminium alloys (A)

Hose couplings "MultiLug" with External Binding

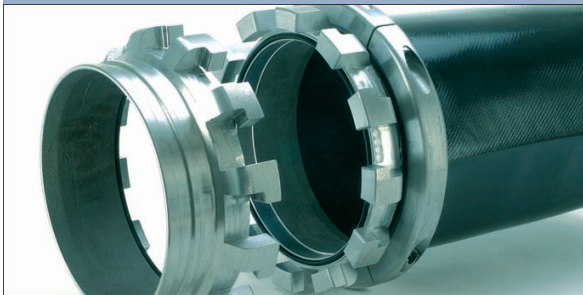

1505

Segment Binding (3 Segments with screws)

For the complete unit the hose coupling and the segment binding is needed.

Nominal size	Lug o. d. B (mm)	Lug i. d. b (mm)	For hose i. d. D (mm)	O. d. of binding (mm)	Wall thickness hose (mm)	Length incl. lugs L (mm)	Weight (kg)	Ident.No.	Remarks	Alloy
10"	320	266	254			115	3,500	10075732	10 lugs	A
10"			254	328	3,5 - 5,0		4,300	60570533	Segment	A
12"	375	320	305			125	4,500	10075532	12 lugs	A
12"			305	388	4,0 - 6,0		4,800	60615333	Segment	A